

# 130FCT-SS


FOR FASTENING FIBRE CEMENT CORRUGATED SHEETS TO  
TIMBER PURLINS. SUPPLIED WITH BAZ WASHER.



## PROPERTIES



MATERIAL	STAINLESS STEEL A2 - 304 GRADE
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	GASH PT
EFFECTIVE THREAD LENGTH	79.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16"RING
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



## PERFORMANCE

### PULL OUT



STEEL THICKNESS (MM)	15mm timber	25mm timber	35mm timber	N/A	N/A
VALUE (kN)	1.94	2.64	3.80		

Grade of material: C16 Timber

### PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

### SHEAR




VALUE (kN)	9.70
------------	------

### TENSILE



VALUE (kN)	6.50
------------	------

## DIMENSIONS

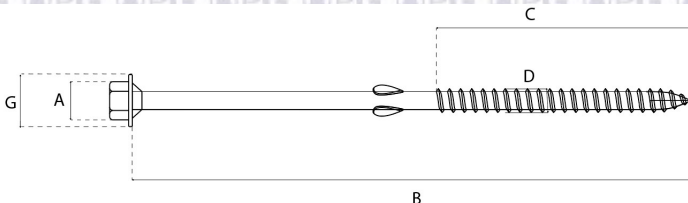

A (MM)	8.64
B (MM)	130.00
C (MM)	86.00
D (MM)	6.50
E (MM)	N/A
F (MM)	N/A
G (MM)	12.70