

130FCT


FOR FASTENING FIBRE CEMENT CORRUGATED SHEETS TO
TIMBER PURLINS. SUPPLIED WITH BAZ WASHER.



PROPERTIES




MATERIAL	CARBON STEEL
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	GASH PT
EFFECTIVE THREAD LENGTH	44.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16" MAG
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE


PULL OUT



STEEL THICKNESS (MM)	15mm timber	25mm timber	35mm timber	N/A	N/A
VALUE (kN)	1.40	2.08	3.52		

Grade of material: C16 Timber

PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	9.60
------------	------

TENSILE



VALUE (kN)	20.90
------------	-------

DIMENSIONS

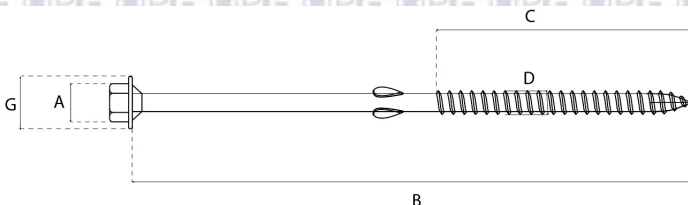

A (MM)	8.64
B (MM)	130.00
C (MM)	52.50
D (MM)	6.35
E (MM)	N/A
F (MM)	N/A
G (MM)	12.70