

# 175.5FC




FOR FASTENING FIBRE CEMENT CORRUGATED SHEETS (80MM-135MM THICKNESS) TO PURLINS OF 4MM-12.5MM THICKNESS. SUPPLIED WITH BAZ WASHER.

## PROPERTIES




MATERIAL	CARBON STEEL
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	5 PT
EFFECTIVE THREAD LENGTH	70.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16" MAG
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



## PERFORMANCE


### PULL OUT



STEEL THICKNESS (MM)	4.00	6.00	8.00	10.00	12.00
VALUE (kN)	9.30	20.90	20.90	20.90	20.90

Grade of material: S275 Steel

### PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

### SHEAR




VALUE (kN)	9.60
------------	------

### TENSILE



VALUE (kN)	20.90
------------	-------

## DIMENSIONS

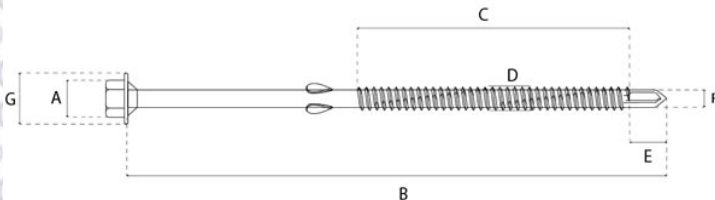

A (MM)	8.64
B (MM)	175.00
C (MM)	75.00
D (MM)	6.35
E (MM)	16.50
F (MM)	5.63
G (MM)	12.70