

22.1


FOR STITCHING MAX 2 X 1.25MM SHEETS



PROPERTIES




MATERIAL	CARBON STEEL
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	1 PT
EFFECTIVE THREAD LENGTH	14.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16" MAG
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	2 x 0.70	N/A	N/A	N/A	N/A
VALUE (kN)	2.66				


Grade of material: Plastisol Sheet

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	9.60
------------	------

TENSILE



VALUE (kN)	20.90
------------	-------

DIMENSIONS

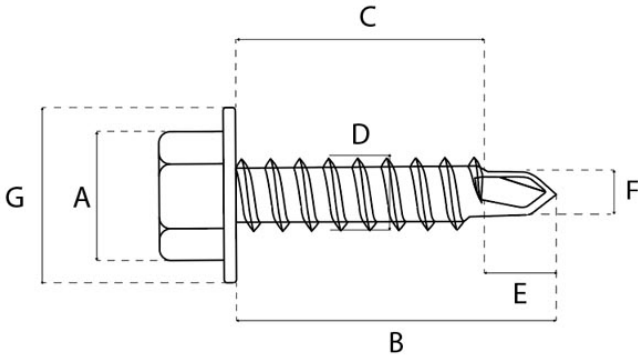

A (MM)	8.64
B (MM)	22.00
C (MM)	17.50
D (MM)	6.30
E (MM)	5.50
F (MM)	3.90
G (MM)	12.25