


28.1MS


FOR STITCHING MAX 2 X 1.25MM SHEETS



PROPERTIES



MATERIAL	CARBON STEEL
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	1 PT
EFFECTIVE THREAD LENGTH	17.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16" MAG
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	2 x 0.70	N/A	N/A	N/A	N/A
VALUE (kN)	3.82				

Grade of material: Plastisol Sheet

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	11.80
------------	-------

TENSILE



VALUE (kN)	14.10
------------	-------

DIMENSIONS

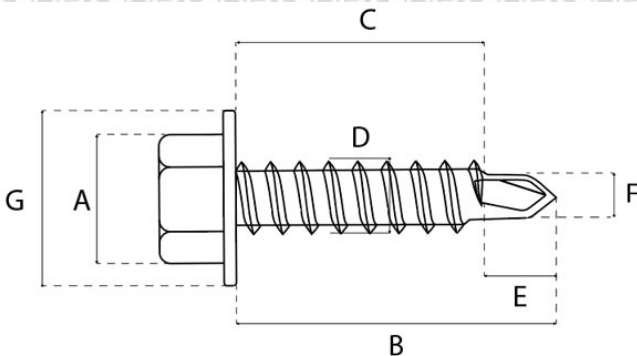

A (MM)	8.64
B (MM)	28.00
C (MM)	21.50
D (MM)	7.50
E (MM)	6.25
F (MM)	4.30
G (MM)	12.25