


33.1SSMS


FOR STITCHING MAX 2 X 1.25MM SHEETS



PROPERTIES




| | |
|------------------------------|--------------------------------|
| MATERIAL | STAINLESS STEEL A2 - 304 GRADE |
| COATING | 500 HRS (SILVER) |
| HEAD TYPE | HEX |
| DRILL POINT | 1 PT |
| EFFECTIVE THREAD LENGTH | 24.00 |
| RECOMMENDED DRILL BIT/SOCKET | SOCKET-HEX-5/16"RING |
| RECOMMENDED DRILL SPEED | 1500 - 2500 RPM |



PERFORMANCE

PULL OUT



| | | | | | |
|----------------------|----------|-----|-----|-----|-----|
| STEEL THICKNESS (MM) | 2 x 0.70 | N/A | N/A | N/A | N/A |
| VALUE (kN) | 3.88 | | | | |

Grade of material: Plastisol Sheet

PULL OVER




| | | | | |
|----------------------|------------|------|------------|------|
| WASHER | 16MM x 2MM | | 19MM x 2MM | |
| SHEET THICKNESS (MM) | 0.50 | 0.70 | 0.50 | 0.70 |
| VALUE (kN) | | | | |

SHEAR




| | |
|------------|-------|
| VALUE (kN) | 14.14 |
|------------|-------|

TENSILE



| | |
|------------|-------|
| VALUE (kN) | 10.79 |
|------------|-------|

DIMENSIONS

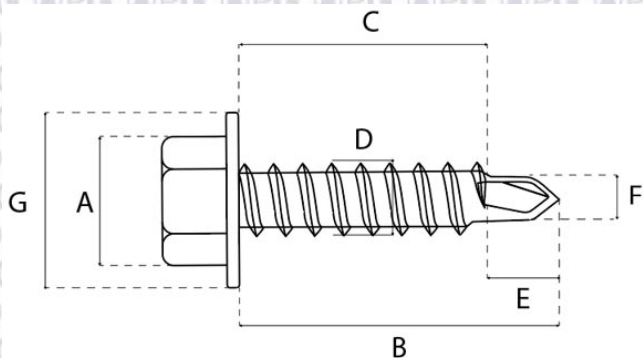

| | |
|--------|-------|
| A (MM) | 8.64 |
| B (MM) | 33.00 |
| C (MM) | 27.00 |
| D (MM) | 7.50 |
| E (MM) | 7.00 |
| F (MM) | 4.30 |
| G (MM) | 12.25 |