



35.1LPW(1000HRS)


FOR FASTENING MAX 2 X 0.75MM SHEETS TO TIMBER



PROPERTIES




MATERIAL	CARBON STEEL
COATING	1000 HRS (SILVER)
HEAD TYPE	LOW PROFILE
DRILL POINT	1 PT
EFFECTIVE THREAD LENGTH	29.00
RECOMMENDED DRILL BIT/SOCKET	BIT-T25
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE


PULL OUT



STEEL THICKNESS (MM)	15mm timber	25mm timber	35mm timber	N/A	N/A
VALUE (kN)	0.76	1.66	2.14		


Grade of material: C16 Timber

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	8.66
------------	------

TENSILE



VALUE (kN)	5.01
------------	------

DIMENSIONS

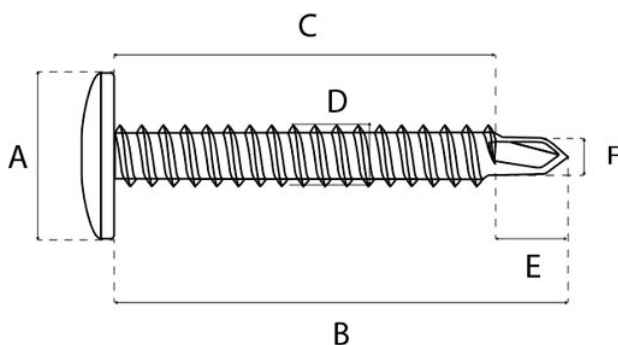

A (MM)	13.40
B (MM)	35.00
C (MM)	31.00
D (MM)	4.80
E (MM)	4.00
F (MM)	3.00
G (MM)	N/A