

38.3T




FOR FASTENING TIMBER (10MM-21MM THICKNESS) TO PURLINS OF 1.5MM-5MM THICKNESS

PROPERTIES



MATERIAL	CARBON STEEL
COATING	500 HRS (SILVER)
HEAD TYPE	COUNTERSUNK
DRILL POINT	3 PT
EFFECTIVE THREAD LENGTH	26.25
RECOMMENDED DRILL BIT/SOCKET	BIT-T25
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	2.00	4.00	6.00	N/A	N/A
VALUE (kN)	2.82				

Grade of material: S275 Steel

PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	6.90
------------	------

TENSILE



VALUE (kN)	10.00
------------	-------

DIMENSIONS

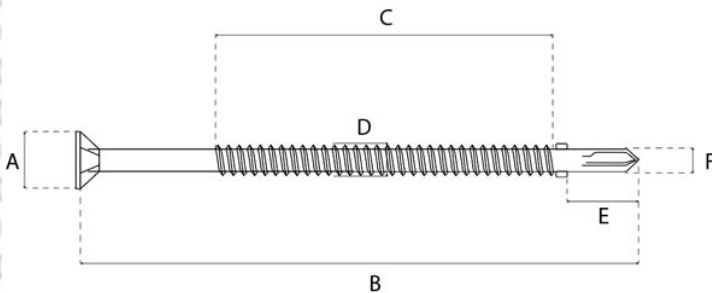

A (MM)	9.32
B (MM)	38.00
C (MM)	22.25
D (MM)	4.80
E (MM)	11.75
F (MM)	4.00
G (MM)	N/A