


47.1KZSS


FOR FASTENING HALTERS TO PURLINS OF 1.2MM-1.5MM THICKNESS



PROPERTIES



MATERIAL	STAINLESS STEEL A2 - 304 GRADE
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	1 PT
EFFECTIVE THREAD LENGTH	39.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16"RING
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	1.20	N/A	N/A	N/A	N/A
VALUE (kN)	3.9				

Grade of material: S450 Steel

PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	11.59
------------	-------

TENSILE



VALUE (kN)	4.34
------------	------

DIMENSIONS

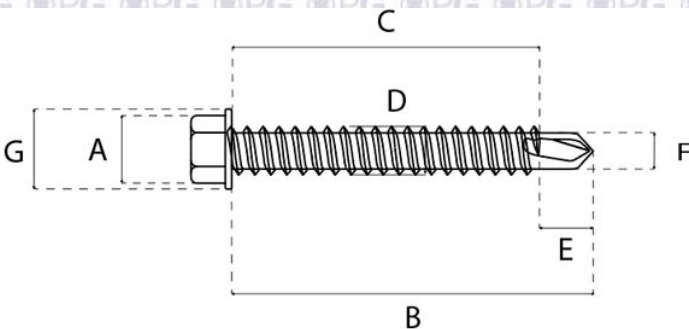

A (MM)	8.71
B (MM)	47.00
C (MM)	41.50
D (MM)	6.30
E (MM)	5.50
F (MM)	4.00
G (MM)	12.60