

# 4H100SS




SUITABLE FOR FIXING TIMBER, SHEET OR STEEL TO CONCRETE, MASONRY AND TIMBER

## PROPERTIES



MATERIAL	STAINLESS STEEL A4 - 316 GRADE
COATING	500 HRS (SILVER)
HEAD TYPE	HEX
DRILL POINT	SHARP PT
EFFECTIVE THREAD LENGTH	46.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16"RING
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



## PERFORMANCE

### PULL OUT



STEEL THICKNESS (MM)	N/A	N/A	N/A	N/A	N/A
VALUE (kN)	N/A				

Grade of material: N/A

### PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

### SHEAR




VALUE (kN)	9.40
------------	------

### TENSILE



VALUE (kN)	12.68
------------	-------

## DIMENSIONS

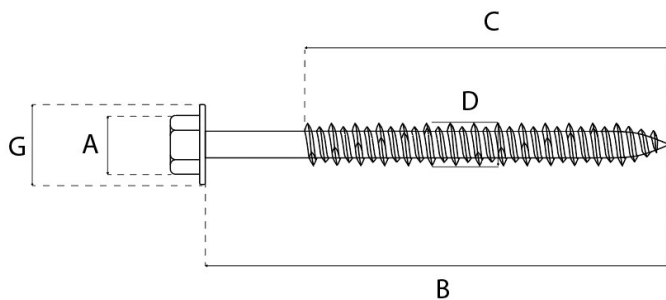

A (MM)	7.83
B (MM)	100.00
C (MM)	51.50
D (MM)	6.35
E (MM)	N/A
F (MM)	N/A
G (MM)	10.55