


4H57


SUITABLE FOR FIXING TIMBER, SHEET OR STEEL TO CONCRETE, MASONRY AND TIMBER



PROPERTIES




MATERIAL	CARBON STEEL
COATING	500 HRS (BLUE)
HEAD TYPE	HEX
DRILL POINT	SHARP PT
EFFECTIVE THREAD LENGTH	52.00
RECOMMENDED DRILL BIT/SOCKET	SOCKET-HEX-5/16" MAG
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	N/A	N/A	N/A	N/A	N/A
VALUE (kN)	N/A				


Grade of material: N/A

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	8.60
------------	------

TENSILE



VALUE (kN)	11.50
------------	-------

DIMENSIONS

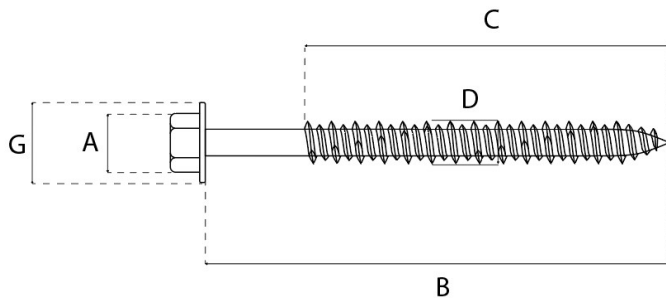

A (MM)	8.64
B (MM)	57.00
C (MM)	57.00
D (MM)	6.35
E (MM)	N/A
F (MM)	N/A
G (MM)	10.55