


# 65.3SST


FOR FASTENING TIMBER (35MM-50MM THICKNESS) TO PURLINS OF 1.5MM-5MM THICKNESS



## PROPERTIES




MATERIAL	STAINLESS STEEL A2 - 304 GRADE
COATING	500 HRS (SILVER)
HEAD TYPE	COUNTERSUNK
DRILL POINT	3 PT
EFFECTIVE THREAD LENGTH	54.00
RECOMMENDED DRILL BIT/SOCKET	BIT-T25
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



## PERFORMANCE

### PULL OUT



STEEL THICKNESS (MM)	2.00	4.00	6.00	N/A	N/A
VALUE (kN)	3.14				

Grade of material: S275 Steel

### PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

### SHEAR




VALUE (kN)	9.33
------------	------

### TENSILE



VALUE (kN)	13.58
------------	-------

## DIMENSIONS

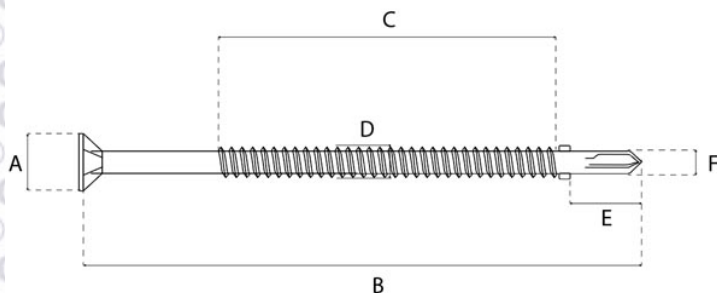

A (MM)	10.70
B (MM)	65.00
C (MM)	57.00
D (MM)	5.50
E (MM)	8.00
F (MM)	4.75
G (MM)	N/A