


65SLPW


FOR FASTENING MAX 2 X 0.75MM SHEETS TO TIMBER



PROPERTIES




MATERIAL	CARBON STEEL
COATING	1000 HRS (SILVER)
HEAD TYPE	LOW PROFILE
DRILL POINT	GASH PT
EFFECTIVE THREAD LENGTH	40.00
RECOMMENDED DRILL BIT/SOCKET	BIT-T25
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	15mm timber	25mm timber	35mm timber	N/A	N/A
VALUE (kN)	1.00	2.70	3.48		


Grade of material: C16 Timber

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	10.58
------------	-------

TENSILE



VALUE (kN)	11.29
------------	-------

DIMENSIONS

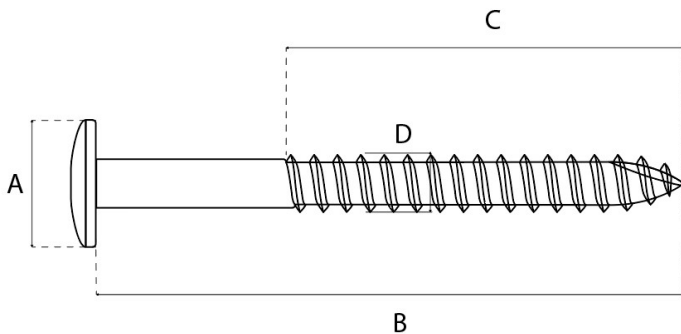

A (MM)	14.50
B (MM)	65.00
C (MM)	45.00
D (MM)	6.30
E (MM)	N/A
F (MM)	N/A
G (MM)	N/A