


65SSSLPW


FOR FASTENING MAX 2 X 0.75MM SHEETS TO TIMBER



PROPERTIES



| | |
|------------------------------|--------------------------------|
| MATERIAL | STAINLESS STEEL A2 - 304 GRADE |
| COATING | BRIGHT ZINC PLATING |
| HEAD TYPE | LOW PROFILE |
| DRILL POINT | GASH PT |
| EFFECTIVE THREAD LENGTH | 40.00 |
| RECOMMENDED DRILL BIT/SOCKET | BIT-T25 |
| RECOMMENDED DRILL SPEED | 1500 - 2500 RPM |



PERFORMANCE

PULL OUT



| STEEL THICKNESS (MM) | 15mm timber | 25mm timber | 35mm timber | N/A | N/A |
|----------------------|-------------|-------------|-------------|-----|-----|
| VALUE (kN) | 0.86 | 2.46 | 3.70 | | |

Grade of material: C16 Timber

PULL OVER



| WASHER | 16MM x 2MM | | 19MM x 2MM | |
|----------------------|------------|------|------------|------|
| SHEET THICKNESS (MM) | 0.50 | 0.70 | 0.50 | 0.70 |
| VALUE (kN) | | | | |

SHEAR




| | |
|------------|-------|
| VALUE (kN) | 10.83 |
|------------|-------|

TENSILE



| | |
|------------|-------|
| VALUE (kN) | 12.16 |
|------------|-------|

DIMENSIONS

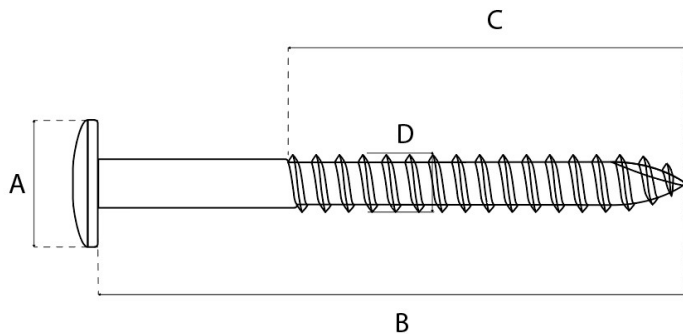

| | |
|--------|-------|
| A (MM) | 14.50 |
| B (MM) | 65.00 |
| C (MM) | 45.00 |
| D (MM) | 6.30 |
| E (MM) | N/A |
| F (MM) | N/A |
| G (MM) | N/A |