


# HD125


FOR FIXING TO DECKING SHEET, CONCRETE OR TIMBER



## PROPERTIES




|                              |              |
|------------------------------|--------------|
| MATERIAL                     | CARBON STEEL |
| COATING                      | OMG CR-10    |
| HEAD TYPE                    | LOW PROFILE  |
| DRILL POINT                  | GASH PT      |
| EFFECTIVE THREAD LENGTH      | 89.00        |
| RECOMMENDED DRILL BIT/SOCKET | BIT-PH-3     |
| RECOMMENDED DRILL SPEED      | MAX 2200 RPM |



## PERFORMANCE


### PULL OUT



| STEEL THICKNESS (MM) | 0.70 | 0.90 | 1.25 | 18MM TIMBER | 38MM TIMBER |
|----------------------|------|------|------|-------------|-------------|
| VALUE (kN)           | 1.60 | 2.20 | 2.70 | 2.20        | 3.40        |

Grade of material: N/A

### PULL OVER



| WASHER               | 16MM x 2MM |      | 19MM x 2MM |      |
|----------------------|------------|------|------------|------|
| SHEET THICKNESS (MM) | 0.50       | 0.70 | 0.50       | 0.70 |
| VALUE (kN)           |            |      |            |      |

### SHEAR




|            |     |
|------------|-----|
| VALUE (kN) | N/A |
|------------|-----|

### TENSILE



|            |     |
|------------|-----|
| VALUE (kN) | N/A |
|------------|-----|

## DIMENSIONS

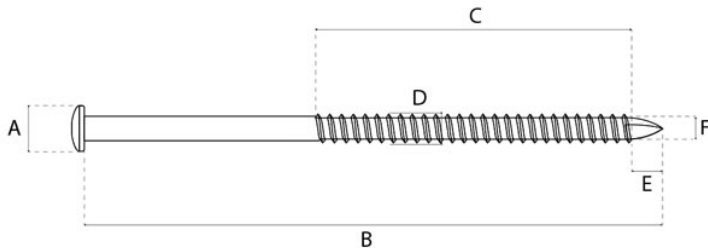

|        |        |
|--------|--------|
| A (MM) | 11.00  |
| B (MM) | 125.00 |
| C (MM) | 95.00  |
| D (MM) | 6.30   |
| E (MM) | 6.50   |
| F (MM) | 4.37   |
| G (MM) | N/A    |