


# HD150


FOR FIXING TO DECKING SHEET, CONCRETE OR TIMBER



## PROPERTIES



MATERIAL	CARBON STEEL
COATING	OMG CR-10
HEAD TYPE	LOW PROFILE
DRILL POINT	GASH PT
EFFECTIVE THREAD LENGTH	89.00
RECOMMENDED DRILL BIT/SOCKET	BIT-PH-3
RECOMMENDED DRILL SPEED	MAX 2200 RPM



## PERFORMANCE

### PULL OUT



STEEL THICKNESS (MM)	0.70	0.90	1.25	18MM TIMBER	38MM TIMBER
VALUE (kN)	1.60	2.20	2.70	2.20	3.40

Grade of material: N/A

### PULL OVER



WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

### SHEAR




VALUE (kN)	N/A
------------	-----

### TENSILE



VALUE (kN)	N/A
------------	-----

## DIMENSIONS

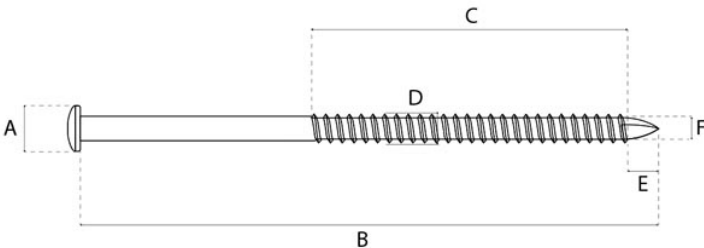

A (MM)	11.00
B (MM)	150.00
C (MM)	95.00
D (MM)	6.30
E (MM)	6.50
F (MM)	4.37
G (MM)	N/A