

HT155.5SSLP




FOR FASTENING COMPOSITE PANELS (65MM-110MM THICKNESS) TO PURLINS OF 4MM-12.5MM THICKNESS

PROPERTIES




MATERIAL	STAINLESS STEEL A2 - 304 GRADE
COATING	BRIGHT ZINC PLATING
HEAD TYPE	LOW PROFILE
DRILL POINT	5 PT
EFFECTIVE THREAD LENGTH	80.00
RECOMMENDED DRILL BIT/SOCKET	BIT-T25
RECOMMENDED DRILL SPEED	1500 - 2500 RPM



PERFORMANCE

PULL OUT



STEEL THICKNESS (MM)	4.00	6.00	8.00	10.00	12.00
VALUE (kN)	8.50	10.11	10.11	10.11	10.11


Grade of material: S275 Steel

PULL OVER




WASHER	16MM x 2MM		19MM x 2MM	
SHEET THICKNESS (MM)	0.50	0.70	0.50	0.70
VALUE (kN)				

SHEAR




VALUE (kN)	7.80
------------	------

TENSILE



VALUE (kN)	10.11
------------	-------

DIMENSIONS

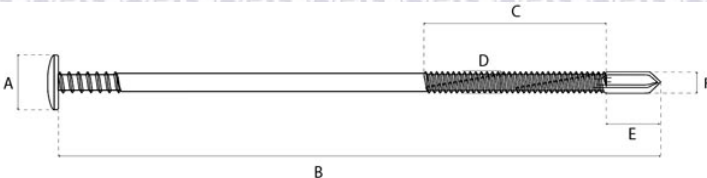

A (MM)	14.50
B (MM)	155.00
C (MM)	85.00
D (MM)	5.50
E (MM)	15.00
F (MM)	5.00
G (MM)	N/A